



# CARRILES TENSORES DE HIERRO FUNDIDO PARA MOTORES ELÉCTRICOS

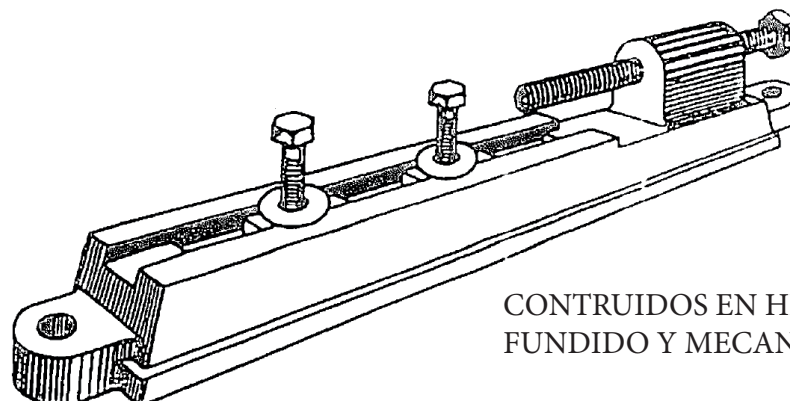

CONTRUIDOS EN HIERRO  
FUNDIDO Y MECANIZADOS

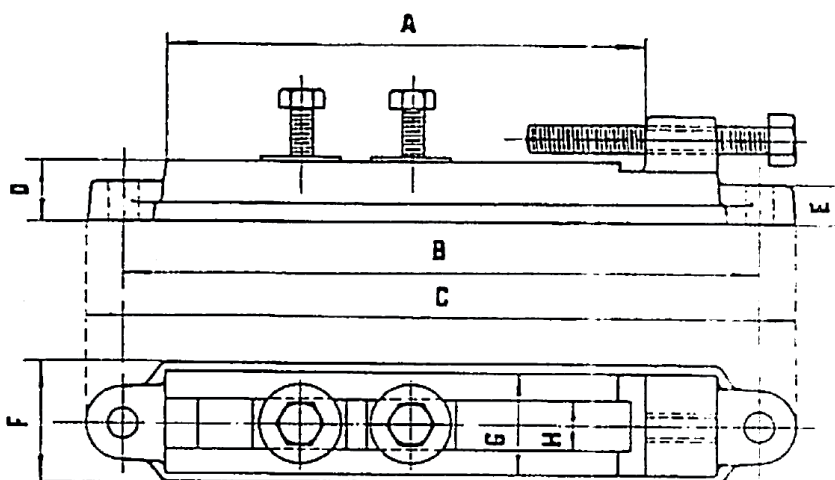

<b>DIMENSIONES Y MEDIDAS APROXIMADAS</b>								
<b>TIPO</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>
250	250	297	325	24	14	47	41	11
300	300	355	390	30	20	55	40	15
350	350	400	432	30	20	55	40	15
400	400	455	490	30	20	55	40	15
450	450	500	532	30	20	55	40	15
500	500	570	610	44	20	69	50	15
600	600	680	730	60	30	87	60	20
700	700	810	870	70	40	105	75	28
900	900	1010	1070	70	40	105	75	28